

# Wireless LAN Based Indoor Positioning System WiPS and Its Simulation

journal or publication title	IEEE Pacific RIM Conference on Communications, Computers, and Signal Processing - Proceedings
volume	Vol. 1
page range	272-275
year	2003
URL	<a href="http://hdl.handle.net/2298/4516">http://hdl.handle.net/2298/4516</a>

doi: <http://doi.org/10.1109/pacrim.2003.1235770>

# Wireless LAN Based Indoor Positioning System WiPS and Its Simulation

Teruaki Kitasuka\*, Tsuneo Nakanishi\*<sup>†</sup> and Akira Fukuda\*

\*Graduate School of Information Science and Electrical Engineering, Kyushu University  
6-1 Kasuga-Koen, Kasuga-shi, Fukuoka 816-8580, JAPAN

<sup>†</sup>System LSI Research Center, Kyushu University  
Email: {kitasuka, tun, fukuda}@f.csce.kyushu-u.ac.jp

**Abstract**—The wireless LAN(Wi-Fi) infrastructure is widely used and many location-aware systems and services are researched. In this paper, wireless LAN based indoor positioning system WiPS is proposed. WiPS uses wireless LAN technology to measure the location of each mobile terminal. Mobile terminals equip only wireless LAN device to communicate and measure its location, so it can be made without any additional devices for location sensing. Existing wireless LAN based location systems measure the signal strength by only access points. On WiPS, each mobile terminal also measures the signal strength of neighboring terminals. Thereby WiPS can achieve more precise location estimation than existing systems, where there are many mobile terminals. We simulate the case that distance measurement has probabilistic error. The result shows improvement of accuracy in WiPS.

## I. INTRODUCTION

Location sensing technology is very important for an infrastructure of an ubiquitous computing environment. Outdoor location sensing technology such as GPS is already developed and widely used. For indoor location sensing, there are a few technologies, but they are not widely used currently. If location sensing technology which uses the wireless LAN infrastructure is developed, it will be used widely and can be a popular way.

As indoor location sensing, there are technologies based on ultrasonic sensor and GPS pseudolite. Both technologies have to need high installation cost and maintenance cost. A system based on ultrasonic sensor[1] have to install many sensors on a ceiling and connect them to a server. A system of GPS pseudolite[2] also have to install pseudo-satellite.

In this paper, we show the design of proposed positioning system WiPS and the result of its simulation. WiPS uses the signal strength between mobile terminals and access points to calculate the location of mobile terminals. Mobile terminals also measure the signal strength of neighboring mobile terminals.

## II. DESIGN OF WIPS

### A. Features

WiPS uses the wireless LAN infrastructure and provides the location information to mobile users. There were a similar research in Microsoft Research[3] and Ekahau[4]. The concept of WiPS have been presented in [5] already. The major features of WiPS are the followings

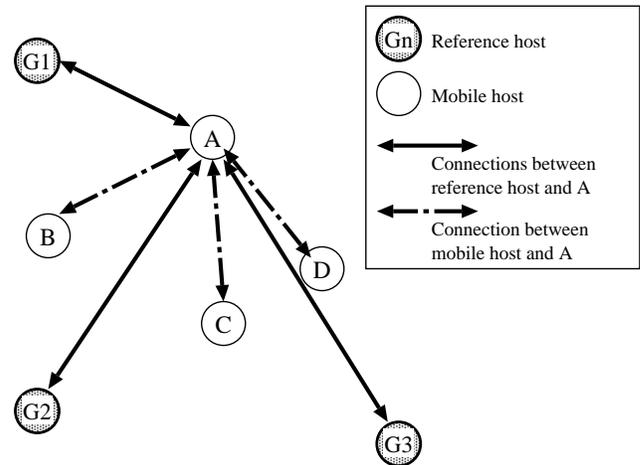


Fig. 1. Basic design of WiPS. A mobile terminal A measure the signal strength of not only access points G1, G2 and G3, but also mobile terminals B, C and D.

- When a density of mobile users i.e. WLAN terminals increases, accuracy of location information becomes high.
- In the situation of sparse density of location reference points such as access points, more precise location information can be provided than usual system.

First feature is matched to a rendezvous in scrouged place such as a hall of an exhibition. Second feature prevents setting cost of many access points from rising.

The signal strength of WLAN radio is used for calculation of the location. However the signal strength does not reflect the distance between terminals directly, because the signal is faded by not only distance but also multi-path and other causes.

To achieve these features, WiPS measures the signal strength by not only access points but also mobile terminals. Each mobile terminal measures the signal strength of access point and neighboring mobile terminals. Then WiPS determines mobile terminals' location by more observations than [3].

In Fig. 1 as an example, a mobile terminal A measures the signal strength of each access point G1, G2 and G3 and also measures it of each mobile terminal B, C and D. On a latest work such as [3], only access points measure the signal strength of a mobile terminal. Generally in WiPS,

many observed signal strength data are used to determine the position of mobile terminals. The number of observations of the signal strength are increased in  $o(n^2)$ , when a number of terminals and access points is denoted by  $n$ . For these observations, WiPS can achieve the above two features.

### B. Algorithm

In WiPS, a location server gathers the signal strength from each mobile terminal and access point. The server calculates the location of each mobile terminal and notifies each mobile terminal. Each access point knows its own absolute location and notifies the location server with the signal strength.

The process of location calculation on a location server is described below. Basically the steepest descent method is used.

- 1) Gather the list of signal strength of each pair of terminals and access points.
- 2) Determine the initial positions of mobile terminals.
- 3) Iterate the modification of the positions of mobile terminals, until convergence.
- 4) Notify the location to each mobile terminal.

In the Step 1), each mobile terminal and access point sends the packet to the server. The packet contains the signal strength list of neighboring mobile terminals and access points. The neighbor means that the terminal is in a radio communication range of another terminal. Each access point adds the location of itself into the packet.

In the Step 2), the server calculates an initial position of mobile terminals by neighboring access points and neighboring initialized terminals. For each mobile terminal denoted by  $A$ , a server selects the neighboring mobile terminals  $N_A$  and access points  $G_A$ . Already initialized mobile terminals are selected from  $N$  and named  $N'_A$ .  $N_A$ ,  $N'_A$  and  $G_A$  is a set of hosts — mobile terminals or access points. The position of terminal  $X$  or access points  $X$  is denoted by  $\mathbf{p}_X$ . The initial position of terminal  $A$  is determined by

$$\mathbf{p}_A = \frac{\sum_{X \in G_A} \mathbf{p}_X + \sum_{X \in N'_A} \mathbf{p}_X}{n(G_A) + n(N'_A)}.$$

$n(G_A)$  and  $n(N'_A)$  are the number of hosts in  $G_A$ ,  $N'_A$  respectively. Initialization is done cyclically until all initial position of mobile terminals are determined.

In the Step 3), mobile terminal positions are refined by the steepest descent method to minimize the expression:

$$\sum_{i=0}^{n-1} \sum_{j=i+1}^n \left| |\mathbf{p}_i - \mathbf{p}_j| - d_{i,j} \right|,$$

when total number of hosts — both mobile terminals and access points — are  $n$ ,  $\mathbf{p}_i$  is the position of  $i$ -th host, and  $d_{i,j}$  is the measured distance between  $i$ -th and  $j$ -th host.

Where the position  $\mathbf{p}_i^{(k)}$  shows the position of  $i$ -th host in  $k$ -th iteration,  $\mathbf{p}_i^{(k+1)}$  is calculated by

$$\mathbf{p}_i^{(k+1)} = \mathbf{p}_i^{(k)} + \alpha \nabla(i),$$

when  $\alpha$  is a suitable small value  $\alpha$  ( $\alpha = 0.05$  is used in later simulation),  $\nabla(i)$  is defined below.

$$\nabla(i) = \sum_{j=0}^n \mathbf{u}_{i,j} \cdot f(i,j),$$

$\mathbf{u}_{i,j}$  is a unit vector from  $\mathbf{p}_j^{(k)}$  to  $\mathbf{p}_i^{(k)}$ .  $f(i,j)$  is the difference between the measured distance  $d_{i,j}$  and the current estimated distance between  $i$ -th and  $j$ -th hosts.  $\mathbf{u}_{i,j}$  and  $f(i,j)$  are defined by following equations.

$$\mathbf{u}_{i,j} = \frac{\mathbf{p}_i^{(k)} - \mathbf{p}_j^{(k)}}{l_{i,j}}, \quad l_{i,j} = \left| \mathbf{p}_i^{(k)} - \mathbf{p}_j^{(k)} \right|,$$

$$f(i,j) = \begin{cases} d_{i,j} - l_{i,j} & \text{if } i \text{ and } j \text{ are neighbors,} \\ 0 & \text{if } i \text{ and } j \text{ are not neighbors} \\ & \text{and } l_{i,j} > d_{\max}, \\ d_{\max} - l_{i,j} & \text{if } i \text{ and } j \text{ are not neighbors} \\ & \text{and } l_{i,j} \leq d_{\max}. \end{cases}$$

$d_{\max}$  is the typical radio communication range.

The iteration is finished when the maximum value of  $\nabla(i)$  is smaller than a suitable value  $\gamma$  ( $\gamma = 0.01$  is used in later simulation).

## III. SIMULATION MODEL AND RESULTS

### A. Simulation Model

To confirm the precision of location information provided by WiPS, we simulate WiPS in 200m square plain. A radio communication range of each host is 100m. 4, 5 or 9 access points are located in the plain and the number of mobile terminals are increased from 5 to 50. The 9 access points case is the case of enough access points, and the case of 4 and 5 access points are the sparse access points case.

In this simulation, our major aim is to confirm the advantage of our distance measurement between mobile terminals. Then, we compare our model with the case that only access points measure the distance to mobile terminals. We also take care that the estimated distance has probabilistic error. However, we don't take care of a movement of each mobile terminal, a communication delay, and a method of distance estimation from a signal strength.

Fig. 2 shows the location of access points, 1 through 9. In the case of 4 access points, the access points numbered 1 to 4 are used. The access points numbered 1 to 5 are used in the 5 access points case. Mobile terminals are put in the plain in a random manner and they don't move.

The cover ratio of access points of each case is discussed here. In the case of 9 access points, 95% area of 200m square plain can reach 3 or more access points directly, but 4% area reaches only 2 access points and under 1% area reaches only 1 access points. In the case of 5 access points, only 24% area reaches 3 access points, 53% area reaches 2 access points, and 23% area reaches only 1 access point. In the case of 4 access points, no area reach three access points directly and 2% area does not reach any access points. 74% and 24% area reach respectively only one and two access points.

We simulate under two assumption for each number of access points. First assumption is measured distance between hosts has probabilistic error. Second assumption is measured distance has no error. Second assumption is not suitable for real environment, if the distance is measured by the radio signal strength. However, we use the second assumption to

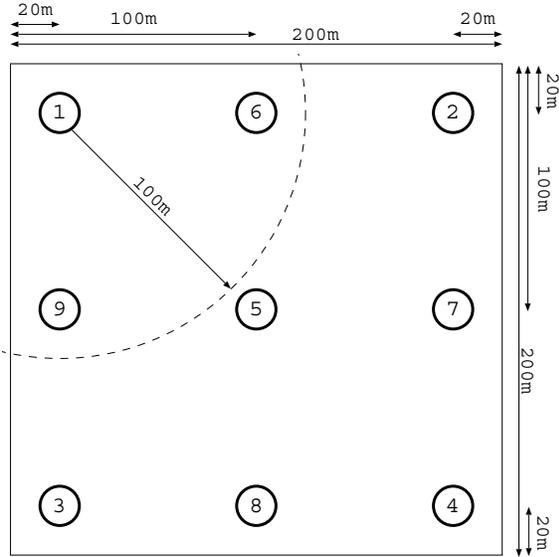


Fig. 2. Simulation environment

show the availability on which the density of access points is very low.

In the first assumption, the measured distance is the sum of real distance and probabilistic error. The probabilistic error is chosen under the normal distribution and is in proportion to the real distance. The proportional error means that, if a real distance between hosts is 100m, we assume the measured distance using signal strength is selected in normal distribution, i.e. between 80m and 120m in 95.5% case. If the distance is half, the error is also half. In the related works[3], [4], they determine the estimated distance from the signal strength in their experiments. But we do not in the simulation.

### B. Simulation Results

Fig. 3 shows the result of the assumption that the measured distance contains 20% error in normal distribution. X-axis is the number of mobile terminals and Y-axis is the average error of estimated location. The average error is defined as an average of difference between real position and estimated position of each mobile terminals. On the access point based method, the average error rate is shown as I-R4-E1, I-R5-E1 and I-R9-E1. Each line shows the case of 4, 5 and 9 access points respectively. The average errors are 42.2m, 16.8m, 6.5m in the case of 4, 5, 9 access points respectively. The averages are almost the same when number of mobile terminal is increased.

The result of proposed method is shown as A-R4-E1, A-R5-E1 and A-R9-E1 in Fig. 3. Each A-Rn-E1 is the result of  $n$  access points case. On the proposed method, the average error decreases as the number of mobile terminal increases. In the case of 5 mobile terminal, the average errors in 4, 5 and 9 access points are respectively 18.5m(44% of access point based method), 10.9m(65%) and 5.5m(86%). When there

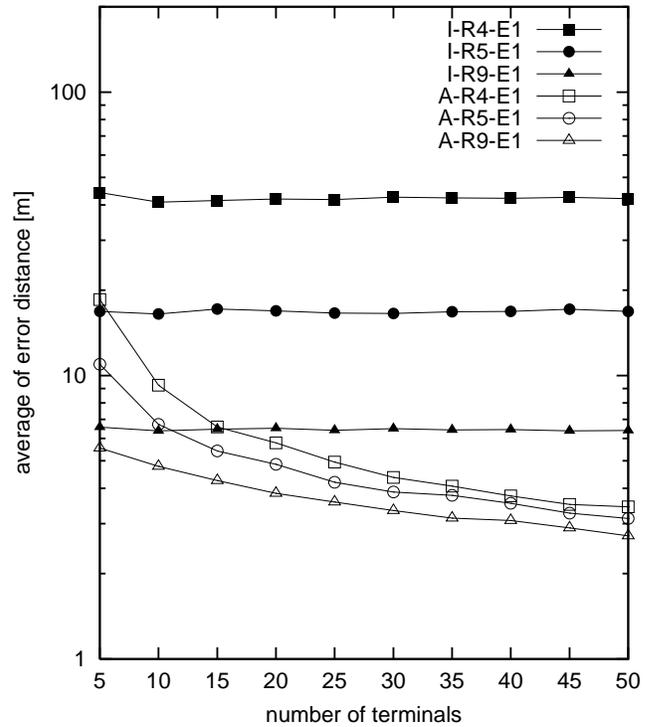


Fig. 3. Simulation results in the cases that distance measurement has probabilistic error. I- means the result of access points based method, A- means proposed method and -Rn- shows the case of  $n$  access points.

are 50 mobile terminals, the average errors are 3.4m(8%), 3.1m(19%) and 2.8m(42%) respectively in 4, 5 and 9 access points cases.

Fig. 4 shows the result of the case assumed that the measured distance is equal to real distance between each pair of hosts. The lines, I-R4-E0 and I-R5-E0, show the access point based method, and the lines A-R4-E0 and A-R5-E0 show the result of the proposed method. \*-R4-\* and \*-R5-\* cases are respectively the case of 4 and 5 access points. The result of 9 access points case is not shown in Fig. 4, since the error is almost zero in both access point based method and proposed method.

Access point based method has no improvement along with increasing of mobile terminal, as same as Fig. 3. Proposed method improves the average of error along with the increment of number of mobile terminals. In the case of 4 access points, the average of error access point based method is 42.0m. On the proposed method, the average of error are 13.8m(33% of 42.0m) and 0.3m(0.7%) respectively in 5 and 50 mobile terminals. In 5 access points case, the average of error access point based method is 12.1m. On the proposed method, the average of error are 2.9m(24% of 12.1m) and 0.1m(1.0%) respectively in 5 and 50 mobile terminals.

Comparing Fig. 3 and Fig. 4, we find that the error of distance measurement between each pair of hosts has a great influence on the accuracy of location estimation. However in both Figs., the number of mobile terminals has an important

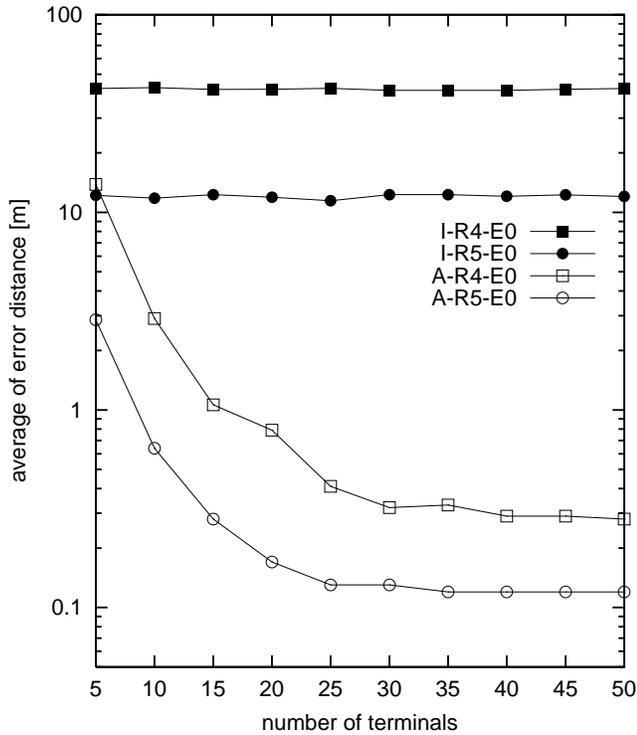


Fig. 4. Simulation results in the cases of error-free distance measurement. I- means the result of access points based method, A- means proposed method and -Rn- means the case of n access points.

effect on proposed method. The effect is greater on the sparse access points case such as 4 or 5 access points case than 9 access points cases.

Finally, Fig. 5 shows the number of iterations for each case. Operation of each iteration is described in Sec. II. The parameters of iteration are  $\alpha = 0.05$  and  $\gamma = 0.01$ . We confirm that the number of iterations is not increased when the number of mobile hosts is increased. Especially in the case of the sparse access point such as 4 and 5 access points case, when the number of mobile terminals is increased, iteration is decreased. Complexity of a iteration is  $o(n^2)$ , where  $n$  is the number of hosts, both access points and mobile terminals. Then the complexity of a estimation of all mobile terminals is  $o(n^2)$  or below.

#### IV. CONCLUSION

We proposed indoor positioning system WiPS, and describe its features. WiPS can achieve better accuracy, where many mobile terminals exist, and also in the place of sparse access points. Mobile terminals can help each other to find its location.

Simulation result is shown. Simulation result ensure the features of WiPS. When the number of mobile terminals is increased, the precision is also increased. The accuracy of estimated location is improved in all cases. Complexity of proposed algorithm is not greater than  $o(n^2)$  on the simulated cases, where  $n$  is the number of hosts, both access points and mobile terminals.

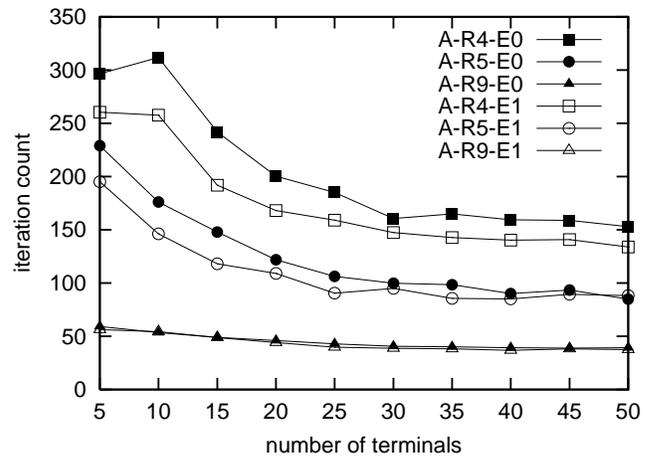


Fig. 5. Number of iteration until convergence

#### ACKNOWLEDGMENT

This research has been partially supported by JPSP Grant-in-Aid for Scientific Research (B) (KAKENHI 12480099), MEXT Grant-in-Aid for Young Scientists (B) (KAKENHI 15700062) and NTT.

#### REFERENCES

- [1] Harter, A., Hopper, A., Steggles, P., Ward, A. and Webster, P.: "The Anatomy of a Context-Aware Application," Proc. of ACM/IEEE MOBI-COM'99, pp. 59-68, Aug. 1999.
- [2] Gobb, H.S.: "GPS Pseudolites: Theory, design, and applications," Ph.D. Thesis, Stanford University, Sep. 1997.
- [3] Bahl, P. and Padmanabhan, V. N.: "RADAR: An In-Building RF-Based User Location and Tracking System," Proc. IEEE INFOCOM 2000, pp. 775-784, 2000.
- [4] Ekahau, Inc.: "Ekahau Positioning Engine 2.0," <http://www.ekahau.com/>
- [5] Kitasuka, T., Nakanishi, T., Fukuda A.: "Location Estimation System using Wireless Ad-Hoc Network," Proc. the 5th International Symposium on Wireless Personal Multimedia Communications (WPMC'2002), pp.305-309, Oct. 2002